

Direktno krmiljeni 3/2 miniaturi ventili serija PRT3-1



SIMBOL




KODA ZA NAROČILO



VRSTA	VELIKOST PRIKLJUČKA	NAPETOST	ŠT. VENTILOV
PRT3-1	M5 - M5	220VAC	1F ... 20F
	018 - G 1/8	24VDC	
		110VAC	
		24VAC	
		12VDC	

DIMENZIJE

PRT3-1

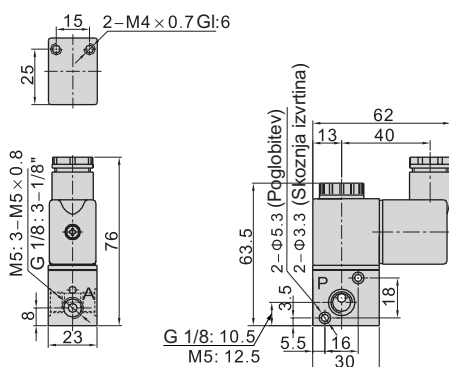

Vezava v serijo ventilov:

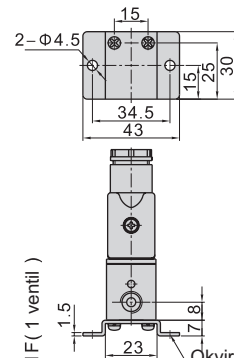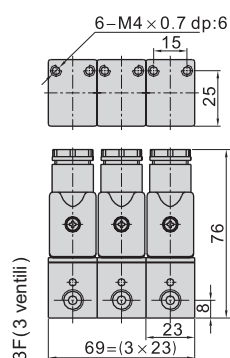


MODEL	PRT3-1 M5	PRT3-1 G 1/8
MEDIJ	Filtriran zrak 20 μ	
AKTIVIRANJE	Direktno	
VELIKOST PRIKLJUČKA	M5	G 1/8
TIP VENTILA	3 priključki 2 položaja (3/2)	
DELOVNI TLAK	0 - 8 bar	
PREIZKUSNI TLAK	12 bar	
TEMPERATURN OBMČJE	-20 / +70°C	
PRETOK 6 bar; PΔ1 bar	Qn=80 NI/min	
NAZIVNA ODPRTINA	Φ 1.2 mm	
MATERIAL OHIŠJA	Aluminij	

SPECIFIKACIJA TULJAVE

NAPETOST	AC220V	AC110V	AC24V	DC24V	DC12V
ODSTOPANJE NAPETOSTI	AC: ± 15%		DC: ± 10%		
ELEKTRIČNA MOČ	4.5VA	4.5VA	5.0VA	3.0W	3.0W
ZAŠČITA	IP65 (DIN40050)				
TEMPERATURNI RAZRED	Razred B				
EL. VHOD	Konektor				
ČAS AKTIVACIJE	max 0.05 sek				
ŠTEVILO PREKLOPOV	10 ciklov/sek				

SESTAVA VENTILOV

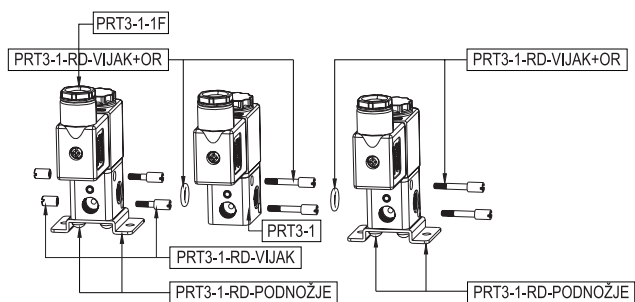

ŠTEVILO VENTILOV POTREBNA KOLIČINA	PRT3-1	PRT3-1-RD-VIJAK	PRT3-1-VIJAK+OR	PRT3-1-RD-PODNOŽJE
PRT3-1-1F	1	0	0	1
PRT3-1-2F	2	1	1	1
...	...	...	...	...
PRT3-1-nF	n	1	n-1	2

"n" je število sestavljenih ventilov in $n \geq 3$